

## Technical Data Sheet

### ASA Filament

ASA 3D printing filament, which is produced with ASA engineering plastics as the main raw material. ASA filament have high toughness, high impact resistance and weather resistance, as well as certain temperature resistance and antistatic properties, and are generally suitable for different FFF 3D printers.

### Main features:

Easy to print/high toughness/high impact resistance/weather resistance

### Main Specifications:

Physical Properties	Test Means		
Density	ISO 1183	g/cm <sup>3</sup>	1.08~1.09
MFR(250°C/2.16Kg)	ISO 1133	g/10min	20~25
Moisture Absorption(23°C/24h)	ISO 62	%	1%
Mechanical Properties			
Tensile strength	ISO 527	Mpa	42~45
Elongation at break	ISO 527	%	9~12
Flexural Modulus	ISO 527	Mpa	1200~1400
Flexural Strength	ISO178	Mpa	75~79
Impact Strength	ISO180	KJ/m <sup>2</sup>	19~20
Thermodynamic Properties			
HDT@ 0.455 MPa(66 psi)	ISO75	°C	88

## Test Sample Printing Conditions:

3D Printer	Guider IIS (Flashforge)
Nozzle Diameter	0.4mm
Nozzle Temperature	250 °C
Printing Speed	50mm/s
Layer	1.2mm
Infill	100%
Standard Printed Sample	See blew attachment

## Recommended Printing Parameters:

Parameters	
Nozzle Temperature	240~260℃ ( 250℃ recommended)
Bed Temperature	100~120℃ (110℃ recommended)
Bed Materials	Tempered glass, BuildTak, Carbon fiber board
Nozzle Diameter	φ 0.4/0.6mm( φ 0.4mm recommended)
Model Cooling Fan	0~50%
Layer	0.12~0.3mm
Printing Speed	40~60mm/s(50mm/s recommended)
Idle Speed	60~120mm/s
Printing Environmental Temperature	Room Temperature to 40℃
Retraction Distance	1~3mm
Retraction Speed	30~50mm/s
Supporting Materials	Itself、HIPS

## Note:

To prevent moisture absorption and contamination, the packaging of filament should be kept airtight and undamaged until they are opened for use. For the same reason, some used filament should be resealed before storage.


ASA is a polymer material. Moisture and oxygen in the air and ultraviolet rays will accelerate the aging of the material. In order not to affect the final printing quality, the ASA filament after opening need to be used up as soon as possible.

ASA material is easy to absorb moisture. If the filament is damp, it is recommended to dry the filament in a hot air oven at 80°C for at least 5 hours to ensure the success rate and quality of the printed model.



## Disclaimer:

Since conditions of use and applicable laws may vary from place to place, it is the customer's responsibility to determine the suitability of the products and product information in this document for the customer's use, and to ensure that their workplace and handling of the product comply with applicable laws and other governmental regulations. The Creation Company assumes no responsibility or liability for the information in this document, nor does it provide any warranty. All implied warranties of merchantability or fitness for a particular purpose under this document are expressly excluded.



## Attachment: Test sample dimensions and printing direction

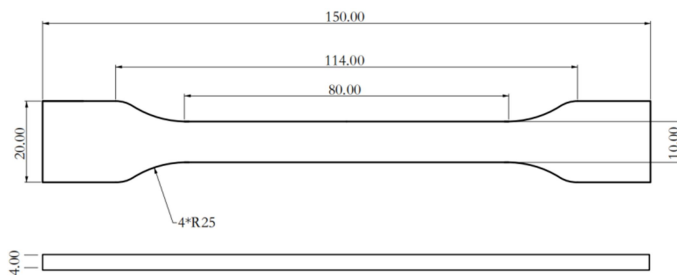

Tensile testing specimen; ASTM D638 (ISO 527, GB/T 1040)

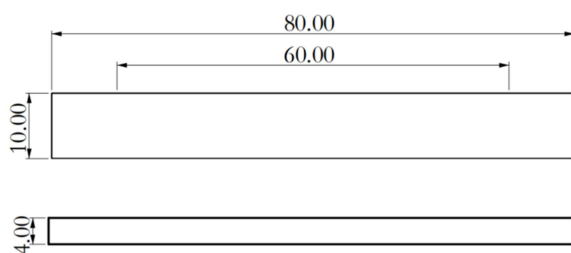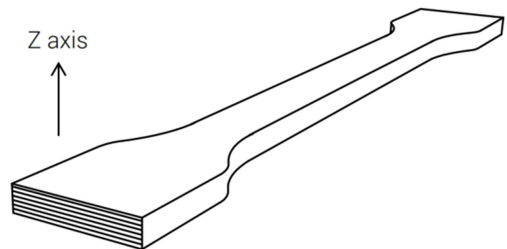

Flexural testing specimen; ASTM D790 (ISO 178, GB/T 9341)

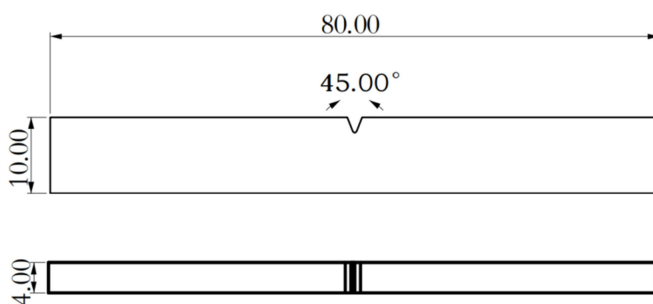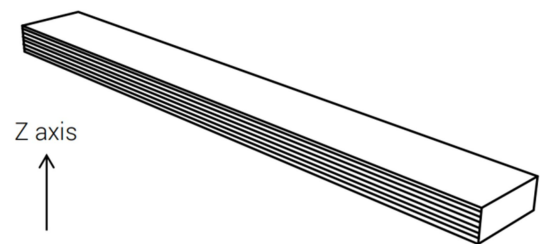

Impact testing specimen; ASTM D256 (ISO 179, GB/T 1043)

